



Outdoor units

Micro model Heat pump systems


4, 5, 6HP (11.2kW~15.5kW)

Model No.	Nominal Cooling Capacity
FDC112KXEN6	11.2kW (220V)
FDC140KXEN6	14.0kW (220V)
FDC155KXEN6	15.5kW (220V)
FDC112KXES6	11.2kW (380V)
FDC140KXES6	14.0kW (380V)
FDC155KXES6	15.5kW (380V)

- Connect up to 8 indoor units/up to 150% capacity.
- High efficiency with COP (in cooling) up to 4.0.
- KX6 employs DC inverter compressors ONLY.
- Industry leading total piping length up to 100m and a maximum pipe run of 70m.




Note: FDUT15KXE6F-E, FDC15KXZE1 and FDK15KXZE1 can not be connected to the above systems.

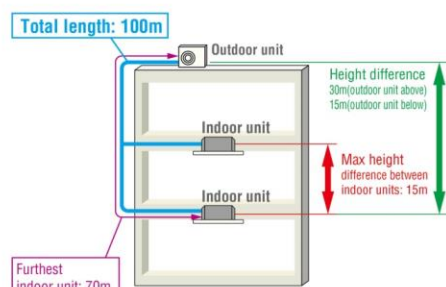

* The total length of ø9.52mm(3/8") liquid piping must be 50m or less

Range of operation



Specifications

Item	Model	FDC112KXEN6	FDC140KXEN6	FDC155KXEN6	FDC112KXES6	FDC140KXES6	FDC155KXES6
Nominal horse power		4HP	5HP	6HP	4HP	5HP	6HP
Power source		1 Phase 220-240V, 50Hz			3 Phase 380-415V, 50Hz		
Starting current		A			5		
Max current		A			13.5		
Nominal capacity	Cooling	kW	11.2	14.0	15.5	11.2	14.0
	Heating		12.5	16.0	16.3	12.5	16.0
Electrical characteristics	Power consumption	kW	2.80	4.17	4.71	2.80	4.17
	Heating		2.89	4.31	4.38	2.89	4.31
Exterior dimensions	HxWxD	mm	845x970x370				
Net weight		kg	85			87	
Sound pressure level	Cooling/Heating	dB(A)	52/54	53/57	53/57	52/54	53/57
Refrigerant	Type / GWP		R410A / 2088				
	Charge	kg/TCO ₂ Eq	5.0 / 10.44				
Refrigerant piping size	Liquid line	mm(in)	ø9.52(3/8")				
	Gas line	mm(in)	ø15.88(5/8")				
Capacity connection		%	80~150				
Number of connectable indoor units			6	8	8	6	8

1. The data are measured under the following conditions (ISO-T1). Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB. Heating: Indoor temp. of 20°CDB, and outdoor temp. of 7°CDB, 6°CWB. Piping length is 7.5m.
2. Sound pressure level indicates the value in an anechoic chamber. During operation these values are somewhat higher due to ambient conditions.
3. 'tonne(s) of CO₂ equivalent' means a quantity of greenhouse gases- expressed as the product of the weight of the greenhouse gases in metric tonnes and of their global warming potential.

Refrigerant piping

Outdoor unit (HP)		4	5	6
Gas pipe	Furthest indoor unit ≈<70m	ø15.88		
Liquid pipe		ø9.52		

Branch pipes



DIS-22-1G
DIS-180-1G


Header pipe



HEAD4-22-1G
HEAD6-180-1G

Dimensions

All measurements in mm.

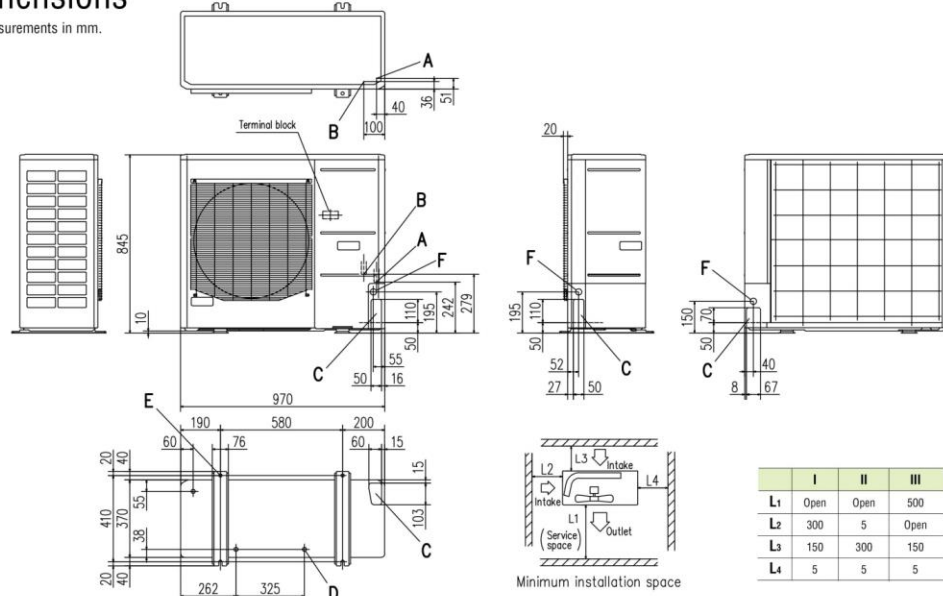

Mark	Content	
A	Service valve connection (gas side)	ø15.88 (5/8") (Flare)
B	Service valve connection (liquid side)	ø9.52 (3/8") (Flare)
C	Pipe/cable draw-out hole	
D	Drain discharge hole	ø20 x 3 places
E	Anchor bolt hole	M10 x 4 places
F	Cable draw-out hole	ø30 x 3 places

Notes:

- (1) It must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) Where the unit is subject to strong winds, lay it in such a direction that the blower outlet faces perpendicularly to the dominant wind direction.
- (4) Leave 1m or more space above the unit.
- (5) A wall in front of the blower outlet must not exceed the units height.
- (6) The model name label is attached on the lower right corner of the front panel.